


Z-LASER

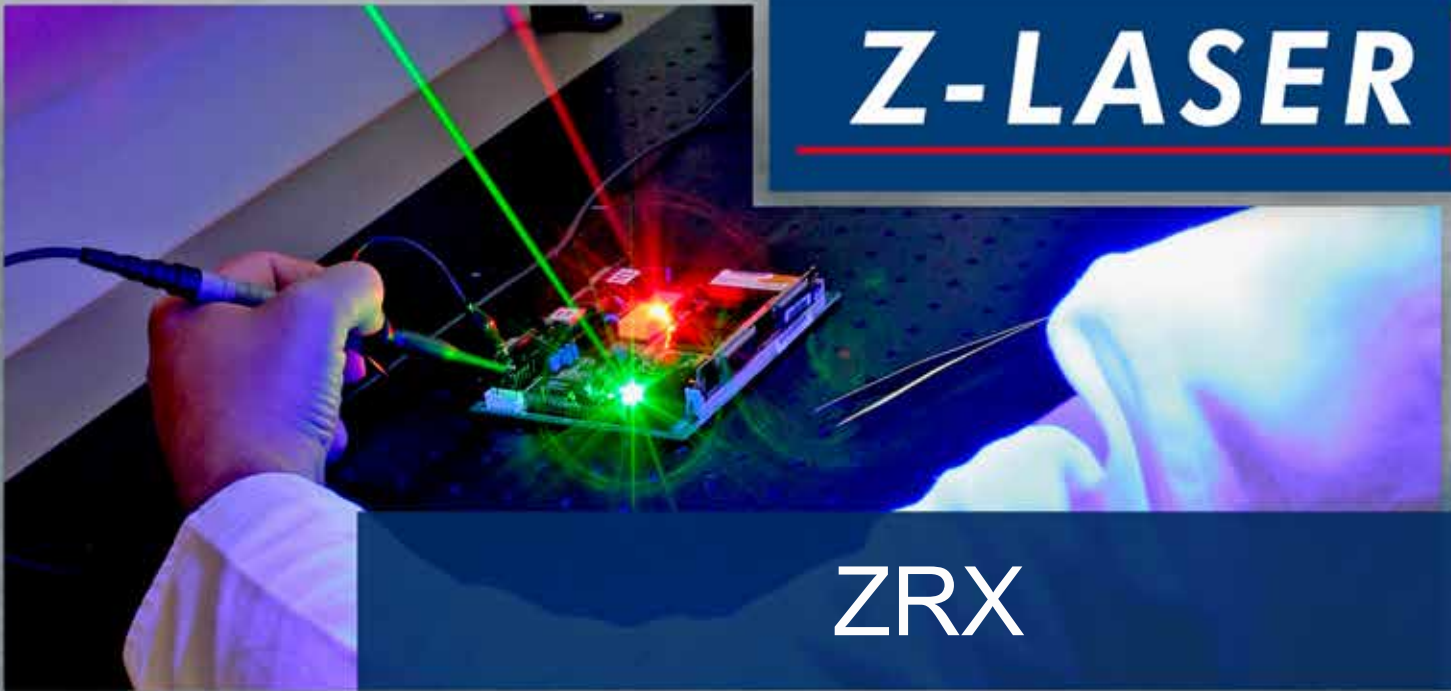

ZRX

- » Laser for cross projection up to 4 x 4m in 3m distance
- » Best visibility (two line lasers in one housing)
- » Integrated wide power voltage range with high noise immunity
- » Optical output power up to 2 x 15mW, red
- » Dimensions: Ø 40 x 201mm

Textile

Wood



ZRX



Ø 40

Mechanical specifications

Dimensions	201mm x Ø 40mm
Housing	Aluminium, powder coated Optic head: Anodised black aluminium
IP rating	IP65
Electrical isolation	Potential-free housing
Connection	Mains plug

Electrical specifications

Supply voltage	90-265VAC
Operation mode	APC with current limiting
Modulation	No
Protection	Integrated power supply with high noise immunity, Overvoltage category III, Burst & Surge resistance Level 4

Optical specifications

Wavelength	635nm
Output power	up to 2x 15mW
Adjustable focus	No
Available optics	2x Line Gaussian

Environmental conditions


Case temperature	-10°C to +40°C
------------------	----------------

CE CE-Conformity according to the directives 2004/108/EC and 73/23/ECC excluding connection type.

Accessories




Gaussian profile



Optics

Hair cross



Order code

Z-X-RX - 635

Power | Wavelength
Product family name

